


LED Linear Asymmetric Alum Profile

LED 30W/per mtr | Anti-glare | 6063 Aviation Aluminum

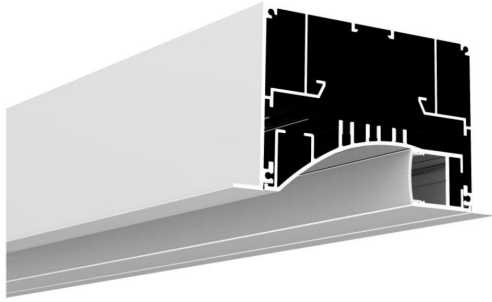

Technical Description

An asymmetric luminaire designed for installation into modular ceiling 600x600 with a visible support structure and into plaster-cardboard ceiling. Designed for school boards and shop shelves.



Installation: Into modular ceiling 600x600 with a visible supported structure or into plaster cardboard ceiling

Application: offices,conference rooms,classrooms

specifications

Material	6063 Aluminum + PC Diffuser
Input Volt	220-240V 50/60Hz
Source Power Type	Osram SMD2835
Source Power	30W
Life Time	50000h L70 B10
Real Flux	120lm/w
CRI	90
Saftey Class	III
Weight	4.8Kg
Power Supply Unit	750 mA
Finish	Anodized Aluminum
Dimensions	L1020W122xH75mm
Cut-out	W100xH74mm
Application	Recessed Mounted
Elliptical Lens	side emitting 120°
Protection Grade	IP44
MCADAMS	2
Labelling	CE

Product Detail

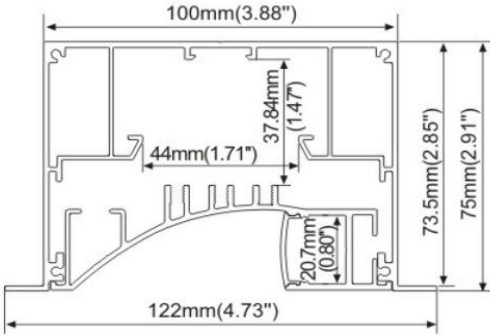

▪ PMMA semi-clear cover



End caps



Internal clip




safety wire



Stainless clip

LM2835R56024P14

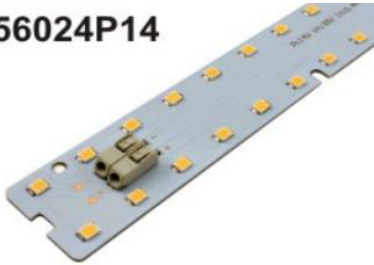

Product Codes

BU118305	Fotia LED Asymmetric Alum Profile LED 30W/mtr 2700K L1020xW122xH75mm Cut: W100xH74mm IP44 220-240V 50/60Hz
BU118306	Fotia LED Asymmetric Alum Profile LED 30W/mtr 3000K L1020xW122xH75mm Cut: W100xH74mm IP44 220-240V 50/60Hz
BU118307	Fotia LED Asymmetric Alum Profile LED 30W/mtr 4000K L1020xW122xH75mm Cut: W100xH74mm IP44 220-240V 50/60Hz