

## Outdoor Linear Wall Washer Light

LED 36W | Osram LED | RGB | IP65



### Technical Description


Extruded aluminum housing. Stainless steel mounting bracket.  
 Optional lighting beam angles : ET6603: 15°, 24°, 45°, 60°,  
 24°x35°, 15°x40°. Silicon rubber ring. High intensity tempered glass/PC.

### specifications


Material	Aluminum 6063+Tempered Glass
Input Volt	DC24V
Source Power Type	CREE CXA1512
Source Power	36W
Life Time	50000h L70 B10
Lumen Output	120 lm/W
Real Flux	3672 lm
Ambient Temperature	+20C+55C
CRI	82
Safety Class	III
Weight	1.5Kg
Finish	Textured Grey-Textured Black
Dimensions	L500xW36xH30mm
Application	Surface Mounted
Beam Angle	24°
Protection Grade	IP65
MCADAMS	2
Labelling	CE

- Available Upon Request  
 Beam Angles 15°/24°/30°/45°/60°/24°x35°/35°x45°  
 CCT 3000K/4000K/5000K

**Photometric Detail**

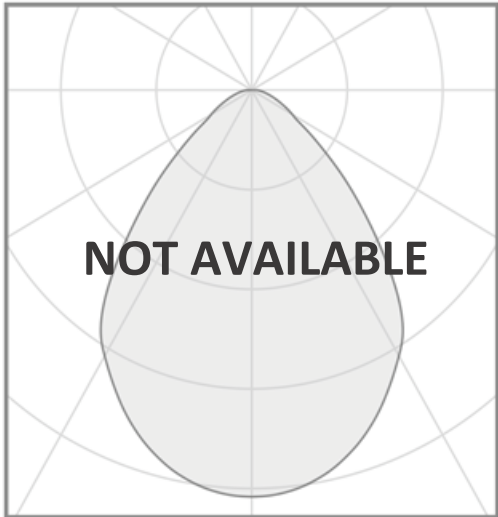

**Technical Dimensions**

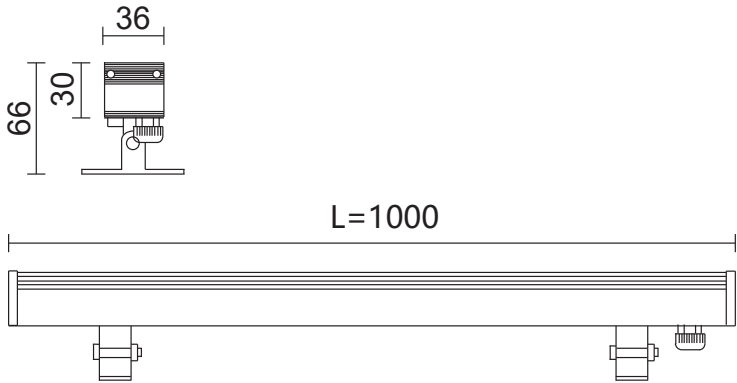

**Product Codes**

24°		
3000K	6000K	RGB
BU113454	BU113458	BU116463